

type number: **P 60\_S**  
**P 60\_F**

height: 54 mm

length: 3000 mm

thickness of metal sheet: 0,8 mm

product description: The partition is used to separate cables in cable trays.  
The connection is performed using the bolts NSM 6X10, 2 pcs per 1 meter. To protect the cables, the bolt head is inside the cable tray.  
A bolt with a GMT surface finish is used for a tray with an F surface finish.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm  
F - Hot Dip Galvanized, zinc-layer 50 - 100 µm  
EC - for indoor environment - total paint - 60 µm



sales amount: á 3000 mm

certification: EN 61537:02

classification: ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: EN 60721-3-1

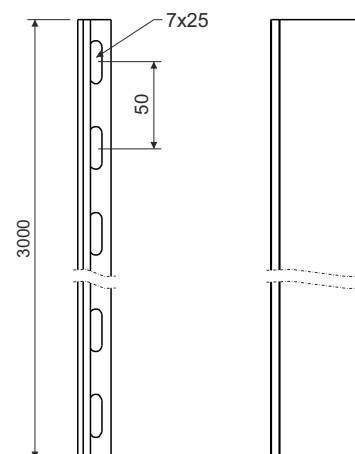

\* Some types of partitions are delivered in 3 m length while stocks last.

