


typ number	weight (kg/pc)
NPPZ_F	0,09

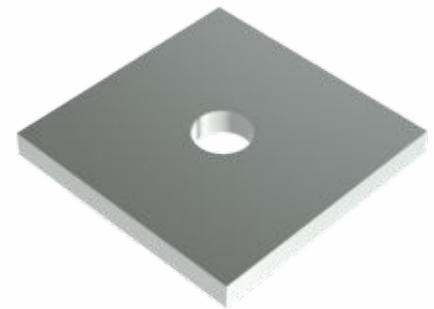

product description: This washer is used when installing the NMP assembly profile.

With a one-sided installation of the NMP assembly profile, when fixing the NKSJ bracket the washer is used below the nut together with an S 10X40 bolt.

With a double-sided installation of the NMP assembly profile, the washer is used as a spacer between the two assembly profiles. It is fixed in place using an S 10X70 bolt.

These items can also be ordered in a varnished version.

surface finish: F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

storage: ČSN EN 60721-3-1

