


| item number | H | A | B | min. amount of bolts for connection | 🔥 |
|---|-----|-----|------|-------------------------------------|----|
| KLT 60X200_S KLT 60X200_F | 60 | 200 | 1400 | 24 | 🔥🔥 |
| KLT 60X300_S KLT 60X300_F | 60 | 300 | 1500 | 24 | 🔥🔥 |
| KLT 60X400_S KLT 60X400_F | 60 | 400 | 1600 | 24 | 🔥🔥 |
| KLT 60X500_S KLT 60X500_F | 60 | 500 | 1700 | 24 | 🔥 |
| KLT 60X600_S KLT 60X600_F | 60 | 600 | 1800 | 24 | 🔥 |
| KLT 85X200_S KLT 85X200_F | 85 | 200 | 1400 | 36 | |
| KLT 85X300_S KLT 85X300_F | 85 | 300 | 1500 | 36 | |
| KLT 85X400_S KLT 85X400_F | 85 | 400 | 1600 | 36 | |
| KLT 85X500_S KLT 85X500_F | 85 | 500 | 1700 | 36 | |
| KLT 85X600_S KLT 85X600_F | 85 | 600 | 1800 | 36 | |
| KLT 110X200_S KLT 110X200_F | 110 | 200 | 1400 | 48 | 🔥 |
| KLT 110X300_S KLT 110X300_F | 110 | 300 | 1500 | 48 | 🔥 |
| KLT 110X400_S KLT 110X400_F | 110 | 400 | 1600 | 48 | 🔥 |
| KLT 110X500_S KLT 110X500_F | 110 | 500 | 1700 | 48 | 🔥 |
| KLT 110X600_S KLT 110X600_F | 110 | 600 | 1800 | 48 | 🔥 |

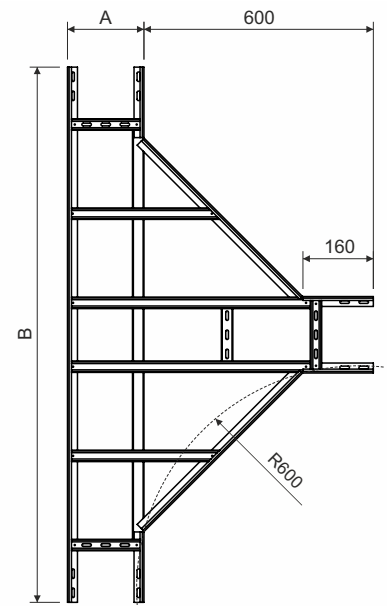

product description: The T-piece is used to branch off cable trays running through cable ladders of the same width.

The connection of the T-piece with the ladder is performed by using the couplings S ..X200 and the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

metal sheet thickness of sidewalls: 1,5 mm
 metal sheet thickness of rungs: 1,2 mm

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized according to EN ISO 1461
 sidewalls - zinc-layer 55 µm (min. 45 µm)
 rungs - zinc-layer 45 µm (min. 35 µm)

sales amount: á 1 pc

certification: EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
 🔥 products are approved for standard constructions
 🔥 products are approved for non-standard constructions

storage: EN 60721-3-1

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



T-piece